



# Installationsbeskrivning

## ASSA ABLOY Elslutbleck 990/940

**ASSA ABLOY**  
Opening Solutions

### Allmänna riktlinjer vid installation

- ASSA ABLOY Elslutbleck i 990/940-serien passar för monteringsstolpar i 9XX/9XXX-serien med 2 alt 4 fästsruvar.
- För att bibehålla egenskaper måste Elslutblecket:
  - Monteras parallellt mot låshuset.
  - Avståndet mellan låsstolpe och monteringsstolpe 3mm +/- 1mm
- Smörj cylinder- och tryckesfall på låshuset med ASSA ABLOY låsfett.

Tänk på följande:



Rätt spänning



Ej övermålning



Noggrant montage



Ej vattentät




Justera ej med elslutblecket monterat

### Inkoppling:

- Spänning 12V DC eller 24V DC, stabiliserad
  - Effekt 6 W max
  - Inbyggd skyddsdiод
  - Samtliga Elslutbleck i 990/940-serien har mikrobrytare (kolvkontakt)
- |       |   |                                 |
|-------|---|---------------------------------|
| 1. +  | } | 12VDC eller 24VDC, stabiliserad |
| 2. -  |   |                                 |
| 3.    |   |                                 |
| 4. NC | } | Kolvkontakt                     |
| 5. C  |   |                                 |
| 6. NO |   |                                 |

### Höjdförhållande låstyper Connect & Classic

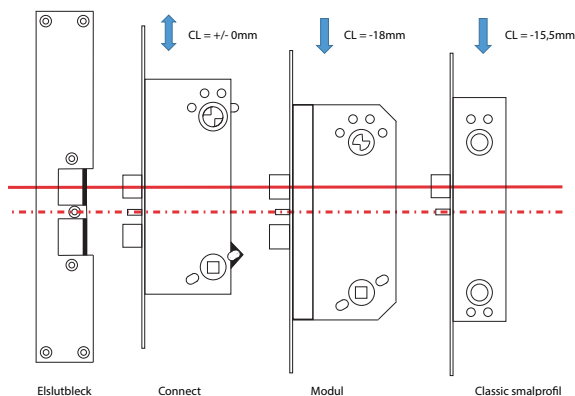

ASSA ABLOY Opening Solutions Sweden

Customer support:

Phone intl. +46 (0)16 17 71 00

Phone nat. 0771-640 640

Fax +46 (0)16 17 73 72

e-mail: [helpdesk.se.openingsolutions@assaabloy.com](mailto:helpdesk.se.openingsolutions@assaabloy.com)

[www.assaabloyopeningsolutions.se](http://www.assaabloyopeningsolutions.se)



# Fitting instruction

## ASSA ABLOY Electric Strike 990/940

### Fitting guidelines

- ASSA ABLOY Electric Strike in 990/940-series should be fitted with faceplates in the 9XX/9XXX-series with 2 or 4 fitting screws.
- To retain the characteristics of the strike it must be:
  - Aligned parallel to the lock case
  - Fitted with a 3mm +/- 1mm gap between the faceplate of the lock case and the face plate of the electric strike
- Lubricate both cylinder- and the handle latch with ASSA ABLOY lock grease

Tänk på följande:



Correct voltage



No overcoating



Careful assembly



Not waterproof




Do not adjust with fitted strike

### Inkoppling:

- Power supply 12V DC or 24V DC, regulated
  - Effect 6 W peak
  - Protection diode is not required
  - All Electric Strikes in the 990/940-series are equipped with micro switch
- |       |   |                              |
|-------|---|------------------------------|
| 1. +  | } | 12VDC eller 24VDC, regulated |
| 2. -  |   |                              |
| 3.    |   |                              |
| 4. NC | } | Latch bolt monitor           |
| 5. C  |   |                              |
| 6. NO |   |                              |

### Height ratios for lock case Connect & Classic

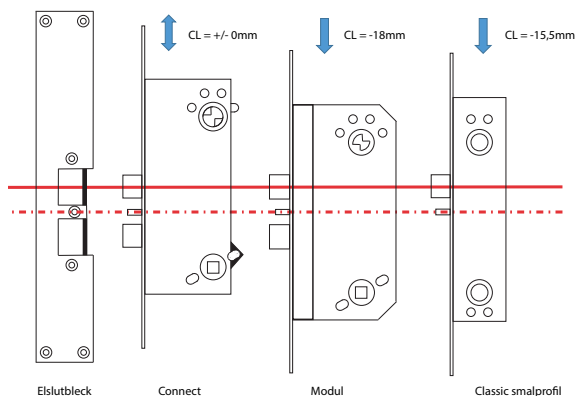

ASSA ABLOY Opening Solutions Sweden

Customer support:

Phone intl. +46 (0)16 17 71 00

Phone nat. 0771-640 640

Fax +46 (0)16 17 73 72

e-mail: [helpdesk.se.openingsolutions@assaabloy.com](mailto:helpdesk.se.openingsolutions@assaabloy.com)

[www.assaabloyopeningsolutions.se](http://www.assaabloyopeningsolutions.se)